


NOTES:

1. BACKFILL WITH 3/4" MINUS ROCK
2. ALL CONCRETE TO BE 3000 PSI @ 28 DAYS.
3. IF IN TRAFFIC AREA, MANHOLE CONE AND LID REQUIRED.



NOT TO SCALE

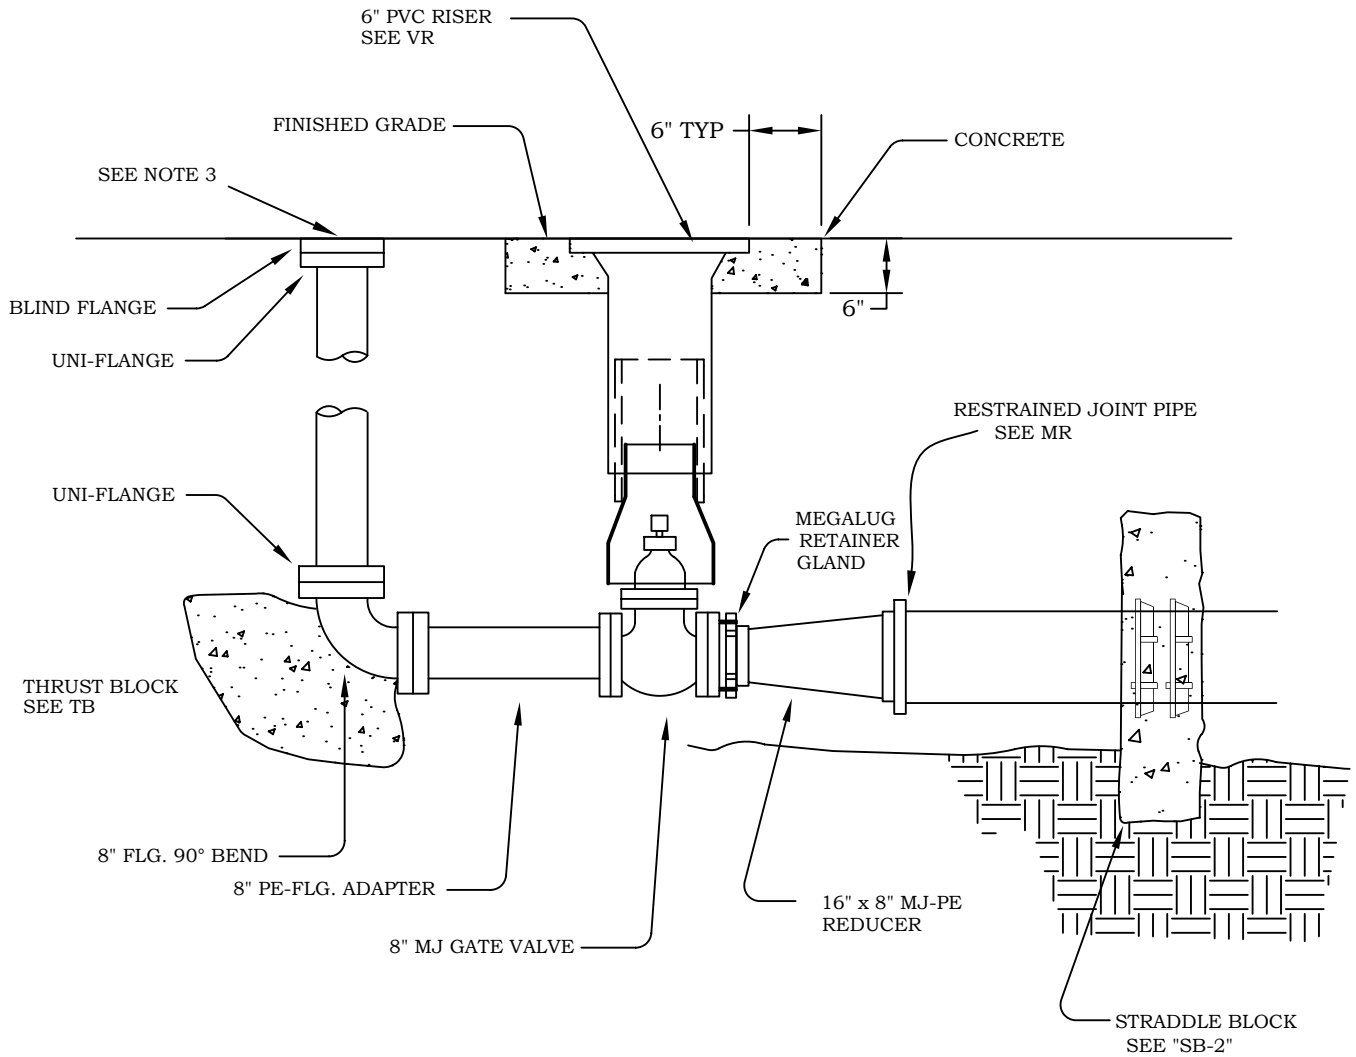

BLOWOFF WITH VALVE FOR 16" DIAMETER PIPE & LARGER

		<h2 style="margin: 0;">BLOWOFF WITH VALVE FOR 16" DIAMETER PIPE & LARGER</h2>		
DATE	REVISION			
		DATE	12/11/14	
		DRAWN	SLW	APPROVED WSC
			SPEC NO.	BO-16